

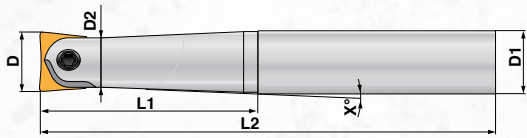


Profile Milling Program Tools




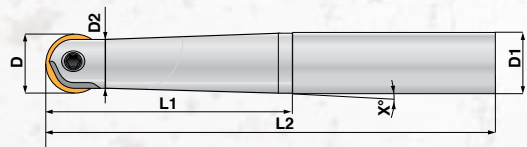
CB CYF - Cylindrical Carbide Shank Holder, Flat

Tool Ordering Number	Dimensions					Screw	Key	Use with Inserts	
	Size ØD	Shank ØD1	Neck ØD2	Neck Length L1	Total Length L2			Type	Code
CBCYF-0500-6.0-0500	0.500	0.500	0.440	1.145	6.625	MS12	T20		BD-N, BD-R, BDS, FB-R, TO, TOBD-NF, HF
CBCYF-0500-6.0-12	0.500	12mm	0.440	1.145	6.625	MS12	T20		
CBCYF-0625-6.0-0625	0.625	0.625	0.550	1.325	6.750	MS16	T20		
CBCYF-0750-8.0-18	0.750	18mm	0.675	1.500	8.875	MS20	T20		
CBCYF-0750-8.0-0750	0.750	0.750	0.675	1.512	8.875	MS20	T20		
CBCYF-1000-8.0-1000	1.000	1.000	0.820	1.866	9.125	MS25	T20		
CBCYF-1000-8.0-25	1.000	25mm	0.882	1.866	9.125	MS25	T20		

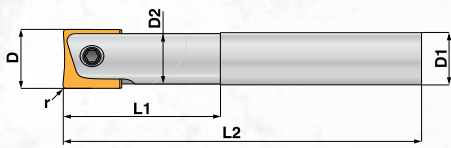


CB TAV - Spike-Line Taper Carbide Shank, Ball & Flat


Tool Ordering Number	Dimensions					X°	Screw	Key	Use with Inserts	
	Size ØD	Shank ØD1	Neck ØD2	Neck Length L1	Total Length L2				Type	Code
CBTAV-0250-6.0-0500	0.250	0.500	0.224	1.181 taper	6.125	6° (3°/side)	MS06N	T7		VRBS, VBD
CBTAV-0250-6.0-0500 LT	0.250	0.500	0.224	2.750 taper	6.125	6° (3°/side)	MS06N	T7		
CBTAV-0312-6.0-0500	0.312	0.500	0.285	1.181 taper	6.125	6° (3°/side)	MS08N	T7		




CB TA - Taper Carbide Uni-Shank Holder, Ball & Flat


Tool Ordering Number	Dimensions					X°	Screw	Key	Use with Inserts	
	Size ØD	Shank ØD1	Neck ØD2	Neck L1	Total L2				Type	Code
CBTA-0375-6.0-0500	0.375	0.500	0.337	1.181 taper	6.125	6° (3°/side)	MS10	T15		MB, MBT, RB-N, BS-N, BD, BDS, FB, TO, HF, RBT

Profile Milling Program Tools

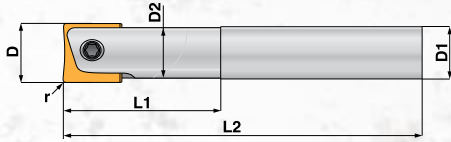



CB CYF - Cylindrical Carbide Shank Holder, Flat

Tool Ordering Number	Dimensions					Screw	Key	Use with Inserts	
	Size ØD	Shank ØD1	Neck ØD2	Neck Length L1	Total Length L2			Type	Code
CBCYF-12-150-12	12	12	10,8	52	165	MS12	T20		BD-N, BD-R, BDS, FB-R, TO, TOBD-NF, HF
CBCYF-16-150-16	16	16	14,4	52	170	MS16	T20		
CBCYF-20-200-20	20	20	18,0	77	225	MS20	T20		
CBCYF-25-200-25	25	25	22,5	93	230	MS25	T20		

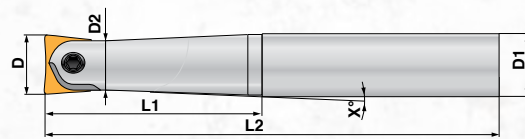


CB TAV - Spike-Line Taper Carbide Shank, Ball & Flat

Tool Ordering Number	Dimensions					X°	Screw	Key	Use with Inserts	
	Size ØD	Shank ØD1	Neck ØD2	Neck Length L1	Total Length L2				Type	Code
CBTAV-06-075-12	6	12	5,7	35	75	6° (3°/side)	MS06N	T7		VRBS, VBD
CBTAV-06-150-12	6	12	5,7	30	155	6° (3°/side)	MS06N	T7		
CBTAV-06-150-12 LT	6	12	5,7	70	155	6° (3°/side)	MS06N	T7		
CBTAV-08-080-12	8	12	7,5	40	80	6° (3°/side)	MS08N	T7		
CBTAV-08-150-12	8	12	7,5	30	155	6° (3°/side)	MS08N	T7		

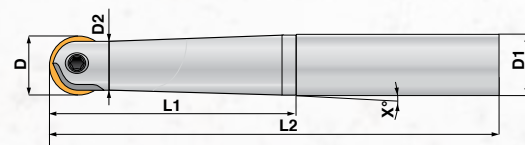

CB TA - Taper Carbide Uni-Shank Holder, Ball & Flat

Tool Ordering Number	Dimensions					X°	Screw	Key	Use with Inserts	
	Size ØD	Shank ØD1	Neck ØD2	Neck L1	Total L2				Type	Code
CBTA-10-150-12	10	12	9,0	30	165	6° (3° side)	MS10	T15		MB, MBT, RB-N, BS-N, BD, BDS, FB, TO, HF, RBT